

Embedded Solutions

USB Interface

ECM310U2M



Transcend's USB Embedded Camera Module ECM310U2M features a high-resolution CMOS sensor, delivering 5MP (2592 × 1944) image quality with smooth video output of up to 60 fps, enabling more detailed and refined image capture.

The ECM310U2M adopts a USB 2.0 interface with a 5-pin connector design and supports the UVC (USB Video Class) protocol, allowing plug-and-play compatibility across most mainstream operating systems. It can be quickly integrated into a wide range of embedded platforms and edge computing devices without the need for additional driver installation.

Hardware Features

- 2K high resolution captures images with outstanding clarity and fine detail.
- Compact and lightweight design, ideal for industrial tablets, POS systems, and gaming machines.
- Includes a USB 5-pin cable, ensuring broad compatibility with a wide range of USB-based embedded systems.

Firmware Features

- Customize image parameters in the driver to ensure image quality meets customer requirements.
- A built-in ISP (Image Signal Processor) automatically optimizes image settings to deliver optimal image quality across various operating environments.


Ordering Information

0X	TS-ECM310U2M
----	--------------

Specifications

Appearance	Dimensions	68 mm x 8 mm x 4.02 mm (2.68" x 0.31" x 0.16")
	Interface	Bus Interface
	Connector	5 pin
Camera	CMOS Sensor	Galaxycore GC2093
	Active Pixel	2592 (H) x 1944 (V) = 5 MP
	Pixel Size	1.12 μ m x 1.12 μ m
	Lens Field of View	86°/73°/58°
	Illumination Type	Front Side Illumination(FSI)
	ADC Resolution	10-bit ADC
	Optical Format	1/5"
	Shutter Type	Rolling Shutter
	Chromaticity	Color
	Maximum Frame Rate	Full size @ 60 fps
	Power	Operating Voltage
Power Consumption (Operation)		1.1 watt(s)
Operating Environment	Operating Temperature	-20°C (-4°F) ~ -70°C (167°F)
	Storage Temperature	-40°C (-40°F) ~ 85°C (185°F)
	Humidity	5% ~ 95%
Warranty	Warranty	Three-year Limited Warranty

Mechanical Dimensions

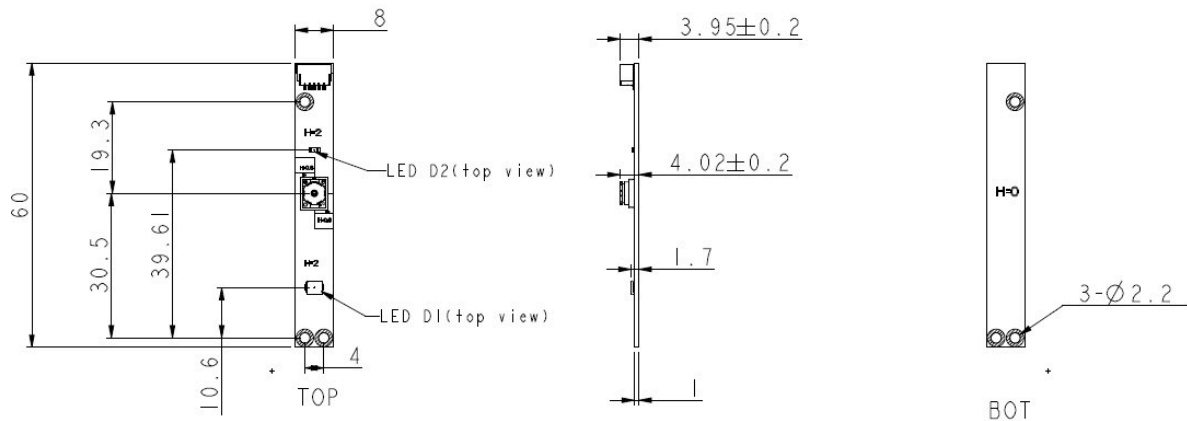

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment. Due to the complexity and variety of industrial applications, Transcend cannot guarantee 100% compatibility with all platforms and under all scenarios. For special applications and environments, it is strongly suggested that you contact Transcend beforehand for clarification.